




Your recycling needs. Our grinding solutions.

# JM Series 15

Technical moulds, reinforced materials, no fine parts, minimum noise level, uniform regrind material, easy maintenance. The new JM Series 15 is suitable for runners recovery in-line with injection moulding machines and scraps.

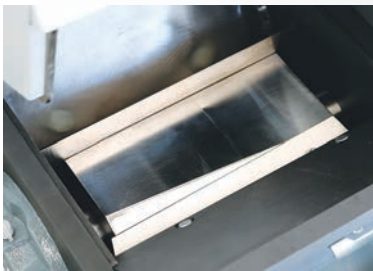

Solid rotor to grant a proper noise level in injection moulding department



Integrated funnel and screen-holder to get better dust-tight



Grinding chamber in 550HV antiwear execution



Easy and tool free access from one side only for ordinary maintenance



Easy to handle with limited lateral footprint to reduce the space between presses

# JM Series 15

## FEATURES JM 2115

Motor power : 1,5 kW  
Feeding opening : 210x140 mm  
N° blades / counterblades : 3/2  
Rotor diameter : 150 mm  
Standard screen : 5 mm  
Standard funnel for loader : Ø 38 mm  
Indicative throughput : 10-20 kg/hr  
Rotor speed : 300 rpm  
Weight : 170 kg



## FEATURES JM 4215

Motor power : 1,5 kW  
Feeding opening : 420x140 mm  
N° blades / counterblades : 3/2  
Rotor diameter : 150 mm  
Standard screen : 5 mm  
Standard funnel for loader : Ø 38 mm  
Indicative throughput : 20-40 kg/hr  
Rotor speed : 300 rpm  
Weight : 230 kg

## OPTIONAL

- A) Blades in antiwear execution
- B) Screen with anti-long holes Ø 5 mm
- C) Special voltages/frequencies
- D) Control level for funnel
- E) Higher version
- F) Regrind material container 40 litri
- G) Control level for regrind material container
- H) Venturi regrind material transport system

## DIMENSIONS

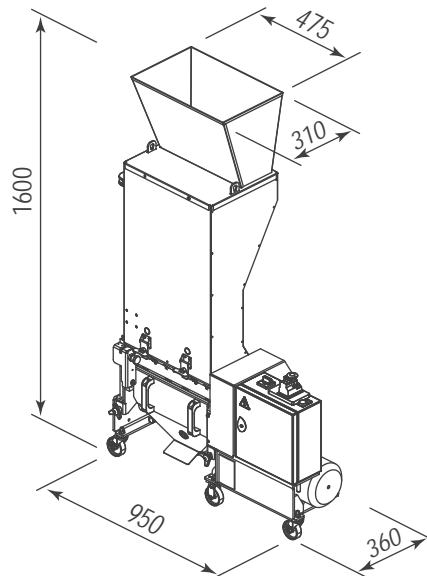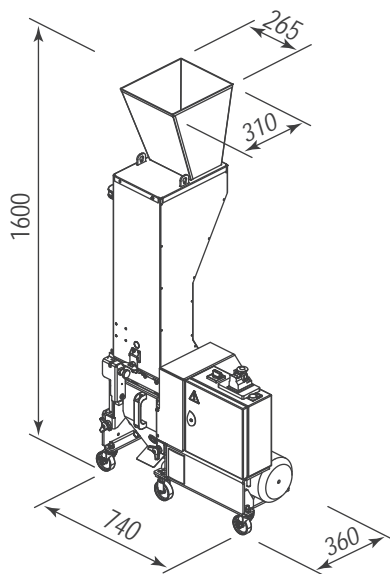


## ACCESSORIES


Hopper suitable for customized conveyor



Lateral extraction by compressed air (l=480 mm)

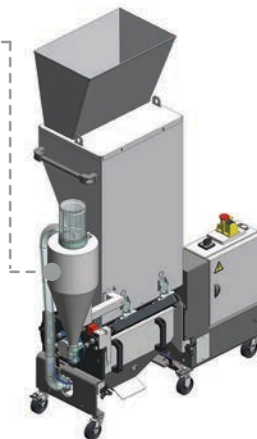

Higher version (h=2000 mm) for box, bag or metallic container

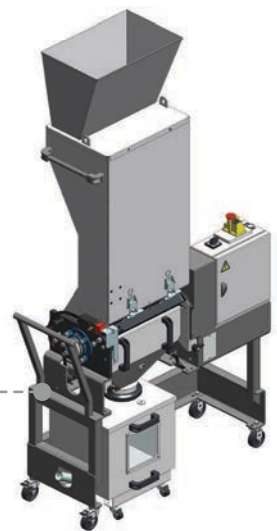

Your recycling needs. Our grinding solutions.

TRIA Italy  
[www.trioplastics.com](http://www.trioplastics.com)

TRIA America  
TRIA Brazil

TRIA China  
TRIA Germany